




R8-3
24" x 30"
R/W


INSTALL ON TYPE 2 BARRICADES THROUGHOUT THE WORK AREA
24 HOURS PRIOR TO IMPLEMENTING TRAFFIC CONTROL.
PRIOR NOTIFICATION OF LOCAL LAW ENFORCEMENT REQUIRED.

NOTES

- 1. CONTROLS SHOWN ARE FOR PEDESTRIAN TRAFFIC ONLY.
- 2. A 60" PATH WIDTH SHOULD BE MAINTAINED (48" IS THE MINIMUM).
- 3. CONTACT AND COORDINATE IMPACTED TRANSIT AGENCIES PRIOR TO IMPLEMENTING ANY CLOSURES.
- 4. SEE SHEET TC-52 FOR TEMPORARY PEDESTRIAN RAMP DETAILS.
- 5. ADA PEDESTRIAN FACILITIES MUST BE MAINTAINED. SEE STANDARD SPECIFICATION 1-10.2(1)B.
- 6. TEMPORARY PEDESTRIAN PUSH BUTTONS SHALL BE PLACED ON THE DIVERTED PATH WHEN EXISTING BUTTONS ARE NOT ACCESSIBLE TO PEDESTRIANS.

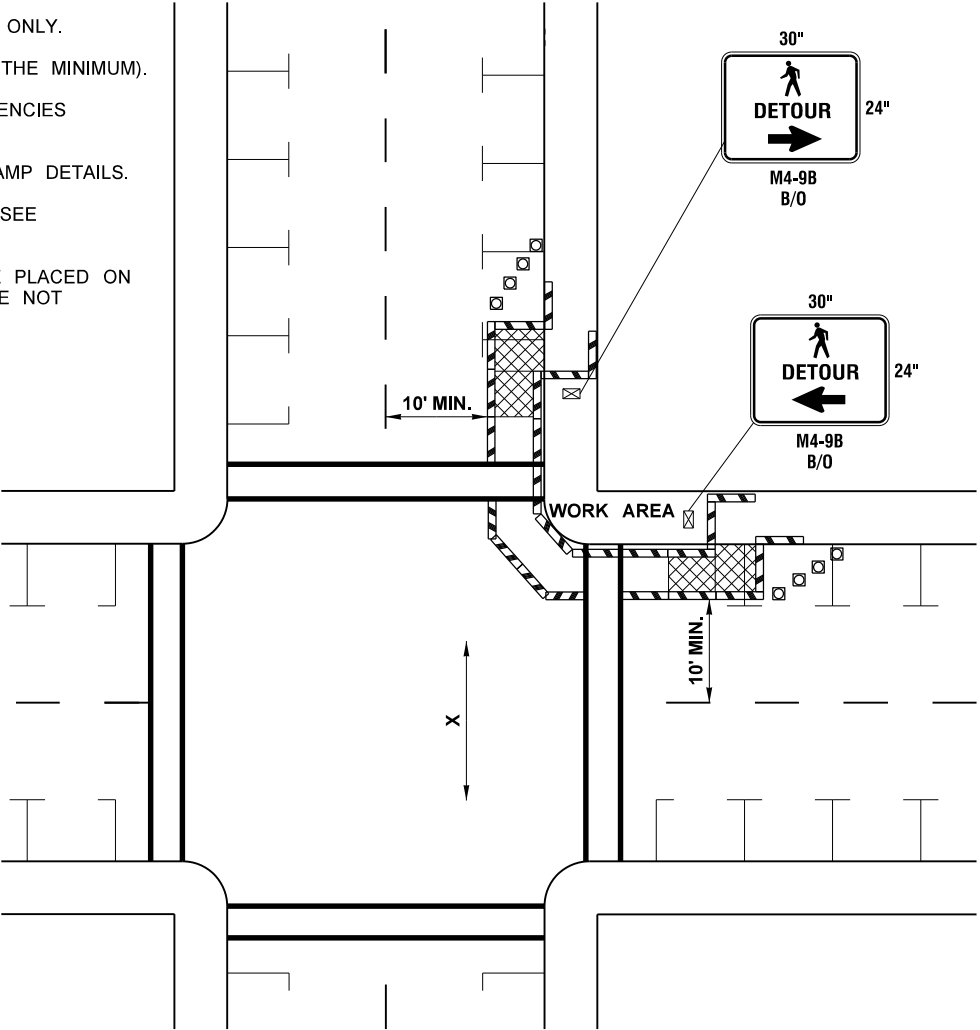

SIDEWALK DIVERSION

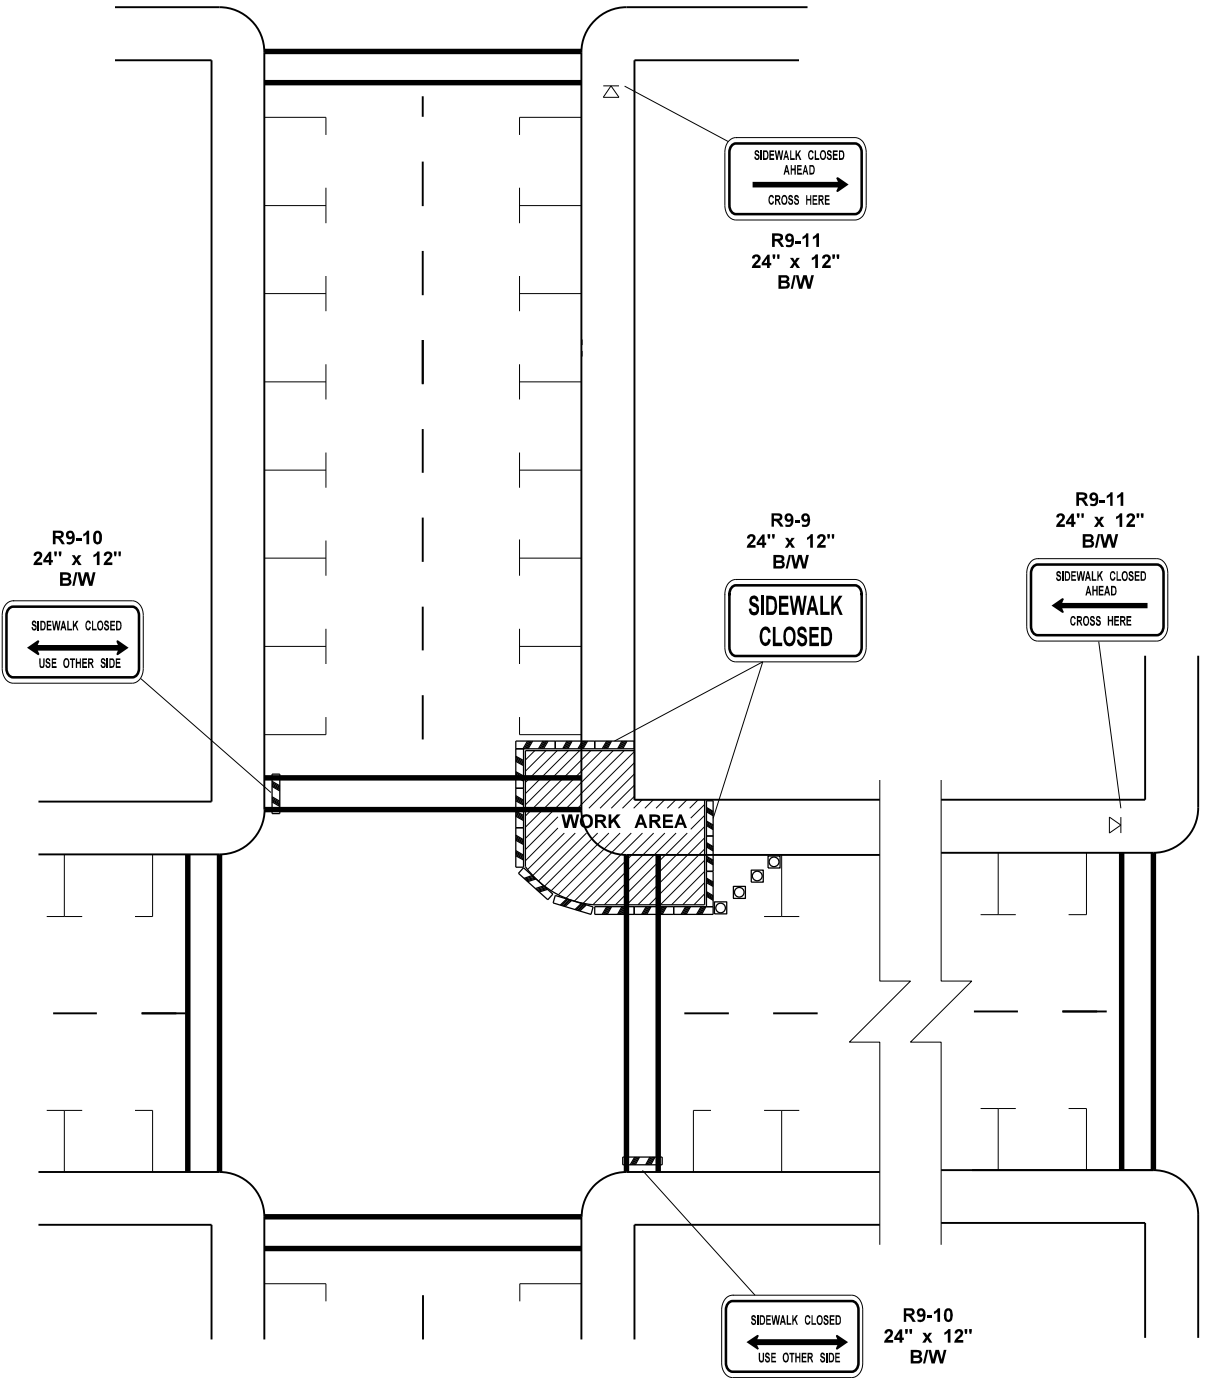

SIDEWALK DETOUR

LEGEND

- TEMPORARY SIGN LOCATION
- CHANNELIZING DEVICES
- PEDESTRIAN CHANNELIZING DEVICES
- TEMPORARY PEDESTRIAN RAMP FOR SIDEWALKS

INTERSECTION PEDESTRIAN TRAFFIC CONTROL

NOT TO SCALE

FILE NAME										S:\Design R P& S\4-Standards\2-Plan Sheet Library\01-Published PSL(TC) Work Zone Traffic Control\W(TC-16) Intersection Pedestrian Traffic Control\TC-16.dgn																				Plot 1																			
TIME					1:28:42 PM															REGION NO.					STATE					FED.AID PROJ.NO.																			
DATE					9/18/2014																				WASH															PLAN REF NO									
PLOTTED BY					FletcCo																																			TC16									
DESIGNED BY																				JOB NUMBER																													
ENTERED BY																																																	
CHECKED BY																				CONTRACT NO.					LOCATION NO.																								
PROJ. ENGR.																																																	
REGIONAL ADM.																									DATE										DATE														
																									P.E. STAMP BOX										P.E. STAMP BOX														
										REVISION										DATE					BY																								
																				</																													